

# Lesson 05

## Multiplication of Matrices

### 5A

- Multiplication of a row vector and a column vector
- Multiplication of a matrix and a matrix
- Basic rules of multiplication

# Multiplication (Row Vector and Column Vector)

## Scalar product

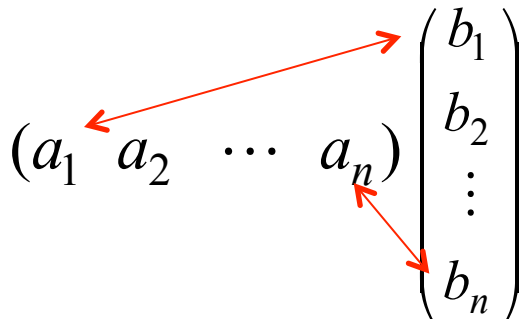
- Vectors  $\vec{a} = (a_1, a_2)$  and  $\vec{b} = (b_1, b_2)$  ← With comma

$$\vec{a} \cdot \vec{b} = a_1 b_1 + a_2 b_2$$

## Row vector and column vector

$$(a_1 \ a_2 \ \cdots \ a_n) \begin{pmatrix} b_1 \\ b_2 \\ \vdots \\ b_n \end{pmatrix} \quad \leftarrow \text{No comma}$$

## Multiplication of a row vector and a column vector

$$(a_1 \ a_2 \ \cdots \ a_n) \begin{pmatrix} b_1 \\ b_2 \\ \vdots \\ b_n \end{pmatrix} = a_1 b_1 + a_2 b_2 + \cdots + a_n b_n$$


# Example

**[Examples 5-1]** Find the values of the following products.

$$(1) \quad (2 \ 6 \ 3) \begin{pmatrix} 8 \\ 1 \\ 4 \end{pmatrix}$$

$$(2) \quad (2 \ 6 \ 3 \ 1) \begin{pmatrix} 8 \\ 1 \\ 4 \end{pmatrix}$$

**Ans.**

$$(1) \quad (2 \ 6 \ 3) \begin{pmatrix} 8 \\ 1 \\ 4 \end{pmatrix} = 2 \times 8 + 6 \times 1 + 3 \times 4 = 34$$

(2) This multiplication is not legal.



Ahh! That's so easy!

# Multiplication of Two Matrices

- When matrix A and matrix B are multiplied, the number of columns of A (  $l \times m$  ) has to be equal to the number of rows of B (  $m \times n$  ).
- Product element  $c_{ij}$  = multiplication of the i-th row of A by the j-th column of B.

The diagram illustrates the multiplication of two matrices A and B to produce matrix C. Matrix A is labeled  $l \times m$  and matrix B is labeled  $m \times n$ . The resulting matrix C is labeled  $l \times n$ .

Matrix A is shown as a grid of rows and columns. The  $i$ -th row of A is highlighted in blue, with elements  $a_{i1}, a_{i2}, \dots, a_{im}$ . Matrix B is shown as a grid of rows and columns. The  $j$ -th column of B is highlighted in blue, with elements  $b_{1j}, b_{2j}, \dots, b_{mj}$ . The resulting matrix C is shown as a grid of rows and columns. The element  $c_{ij}$  in the  $i$ -th row and  $j$ -th column of C is highlighted in blue. A blue arrow points from the expression  $a_{i1}b_{1j} + a_{i2}b_{2j} + \dots + a_{im}b_{mj}$  to the element  $c_{ij}$ .

$$\begin{pmatrix} \dots & \dots & \dots & \dots & \dots \\ \dots & \dots & \dots & \dots & \dots \\ a_{i1} & a_{i2} & \dots & \dots & a_{im} \\ \dots & \dots & \dots & \dots & \dots \\ \dots & \dots & \dots & \dots & \dots \end{pmatrix} \begin{pmatrix} \vdots & \vdots & b_{1j} & \vdots & \vdots \\ \vdots & \vdots & b_{2j} & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ \vdots & \vdots & b_{mj} & \vdots & \vdots \end{pmatrix} = \begin{pmatrix} \dots & \dots & \dots & \dots & \dots \\ \dots & \dots & \dots & \dots & \dots \\ \dots & \dots & (i, j) & \dots & \dots \\ \dots & \dots & \vdots & \vdots & \vdots \\ \dots & \dots & \vdots & \vdots & \vdots \end{pmatrix}$$

$a_{i1}b_{1j} + a_{i2}b_{2j} + \dots + a_{im}b_{mj}$

# Example

**[Examples 5-2]** Calculate the following multiplication

$$(1) \quad \begin{pmatrix} a & b \\ c & d \end{pmatrix} \begin{pmatrix} x & y \\ z & u \end{pmatrix} \quad (2) \quad \begin{pmatrix} 2 & 8 & 1 \\ 3 & 6 & 4 \end{pmatrix} \begin{pmatrix} 1 & 7 \\ 9 & -2 \\ 6 & 3 \end{pmatrix}$$

**Ans.** (1)  $\begin{pmatrix} ax + bz & ay + bu \\ cx + dz & cy + du \end{pmatrix}$

$$(2) \quad \begin{pmatrix} 2 \times 1 + 8 \times 9 + 1 \times 6 & 2 \times 7 + 8 \times (-2) + 1 \times 3 \\ 3 \times 1 + 6 \times 9 + 4 \times 6 & 3 \times 7 + 6 \times (-2) + 4 \times 3 \end{pmatrix} = \begin{pmatrix} 80 & 1 \\ 81 & 21 \end{pmatrix}$$

# Basic Rules of Multiplication

## The following rules hold

1. About scalar multiplication  $(kA)B = A(kB) = k(AB)$
2. The associative law  $(AB)C = A(BC)$
3. The distributive law  $(A + B)C = AC + BC$   
 $A(B + C) = AB + AC$

**But the commutative law does not hold**

$$\begin{array}{ccccccc} & & \boxed{AB \neq BA} & & & & \\ & \swarrow & \uparrow & \uparrow & \nwarrow & & \\ l \times m & m \times n & m \times n & l \times m \end{array}$$

## Example

$$\begin{pmatrix} 1 & 2 \\ 2 & 1 \end{pmatrix} \begin{pmatrix} 1 & 3 \\ 2 & 2 \end{pmatrix} = \begin{pmatrix} 5 & 7 \\ 4 & 8 \end{pmatrix}$$

$$\begin{pmatrix} 1 & 3 \\ 2 & 2 \end{pmatrix} \begin{pmatrix} 1 & 2 \\ 2 & 1 \end{pmatrix} = \begin{pmatrix} 7 & 5 \\ 6 & 6 \end{pmatrix}$$

# Unit Matrix, Zero Matrix

## Identity matrix (Unit matrix)

A square matrix with ones on the diagonal element and zeros elsewhere.

$$I = \begin{pmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{pmatrix}$$

## Zero matrix

A matrix with all its entries being zero.

$$O = \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix}$$

## Properties

1.  $AI = IA = A$
2.  $AO = OA = O$
3. [note] Product of non-zero matrices may become zero.

**Example**  $\begin{pmatrix} 2 & -2 \\ 1 & -1 \end{pmatrix} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix} = \begin{pmatrix} 0 & 0 \\ 0 & 0 \end{pmatrix}$   **$AB = O$**

# Exercise

**[Ex.5-1]** Calculate the following multiplication.

$$(1) \quad \begin{pmatrix} 4 & 2 \\ 3 & 1 \end{pmatrix} \begin{pmatrix} -1 & 0 \\ 5 & -1 \end{pmatrix}$$

$$(2) \quad \begin{pmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix}$$

**Ans.**

Pause the video and solve the problem by yourself.



# Answer to the Exercise

**[Ex.5-1]** Calculate the following multiplication.

$$(1) \quad \begin{pmatrix} 4 & 2 \\ 3 & 1 \end{pmatrix} \begin{pmatrix} -1 & 0 \\ 5 & -1 \end{pmatrix}$$

$$(2) \quad \begin{pmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix}$$

**Ans.**

$$(1) \quad \begin{pmatrix} 4 & 2 \\ 3 & 1 \end{pmatrix} \begin{pmatrix} -1 & 0 \\ 5 & -1 \end{pmatrix} = \begin{pmatrix} 4 \cdot (-1) + 2 \cdot 5 & 4 \cdot 0 + 2 \cdot (-1) \\ 3 \cdot (-1) + 1 \cdot 5 & 3 \cdot 0 + 1 \cdot (-1) \end{pmatrix} = \begin{pmatrix} 6 & -2 \\ 2 & -1 \end{pmatrix}$$

$$(2) \quad \begin{pmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{pmatrix} = \begin{pmatrix} 1+0+0 & 1+1+0 & 1+1+1 \\ 0+0+0 & 0+1+0 & 0+1+1 \\ 0+0+0 & 0+0+0 & 0+0+1 \end{pmatrix} = \begin{pmatrix} 1 & 2 & 3 \\ 0 & 1 & 2 \\ 0 & 0 & 1 \end{pmatrix}$$

## Lesson 05

# Multiplication of Matrices and Determinant

### 5B

- Definition of the determinant
- Calculating the determinant

# Definition of a Determinant

- The determinant of a matrix is a special **number** that can be calculated from a matrix.
- It is useful in the study of a system of linear equations, that of a linear transformation, and others.
- The determinant is defined for **a square matrix**.

## Notation

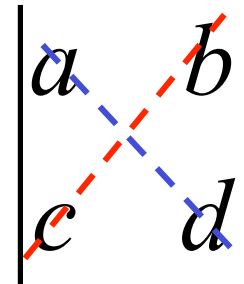
$$A = \begin{pmatrix} a & b \\ c & d \end{pmatrix} \quad \Rightarrow \quad |A| \quad \begin{vmatrix} a & b \\ c & d \end{vmatrix} \quad \det A$$

# Calculation of Determinant for 2×2-matrix

$$A = \begin{pmatrix} a & b \\ c & d \end{pmatrix}$$

The determinant is  $|A| = ad - bc$

Memorize this calculation as


$$\begin{vmatrix} a & b \\ c & d \end{vmatrix}$$

**Example**

$$\begin{vmatrix} 2 & 3 \\ 1 & 5 \end{vmatrix} = +2 \cdot 5 - 3 \cdot 1 = 7$$

# Calculation of Determinant for 3×3-matrix

$$A = \begin{pmatrix} a & b & c \\ d & e & f \\ g & h & i \end{pmatrix}$$

The determinant is  $|A| = a(ei - fh) - b(di - fg) + c(dh - eg)$

Memorize this calculation as

$$+ \begin{array}{c} a \\ \times \\ \left| \begin{array}{cc} e & f \\ h & i \end{array} \right| \end{array} - \begin{array}{c} b \\ \times \\ \left| \begin{array}{cc} d & f \\ g & i \end{array} \right| \end{array} + \begin{array}{c} \left| \begin{array}{cc} d & e \\ g & h \end{array} \right| \times c \end{array}$$



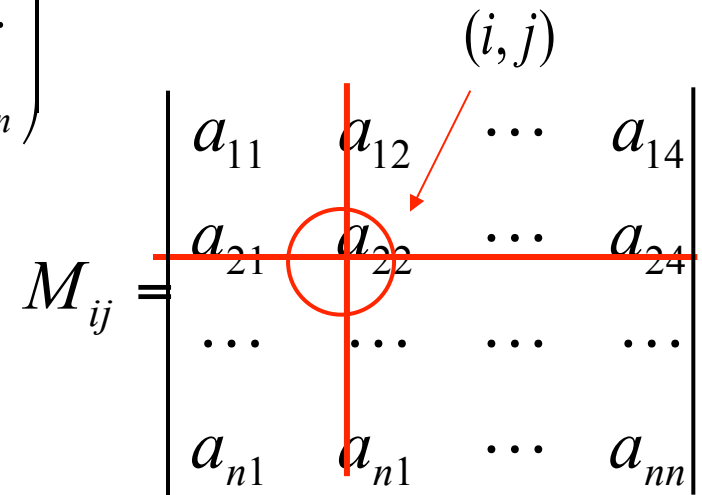
# Minor and Cofactor

For a  $n \times n$  matrix

$$A = \begin{pmatrix} a_{11} & a_{12} & \cdots & a_{1n} \\ a_{21} & a_{22} & \cdots & a_{2n} \\ \cdots & \cdots & \cdots & \cdots \\ a_{n1} & a_{n2} & \cdots & a_{nn} \end{pmatrix}$$

## Minor

Minor  $M_{ij}$  is the determinant of the  $(n-1) \times (n-1)$ -matrix obtained by deleting the  $i$ -th row and the  $j$ -th column.

$$M_{ij} = \begin{vmatrix} a_{11} & a_{12} & \cdots & a_{1n} \\ a_{21} & a_{22} & \cdots & a_{2n} \\ \cdots & \cdots & \cdots & \cdots \\ a_{n1} & a_{n2} & \cdots & a_{nn} \end{vmatrix}$$


## Cofactor

The cofactor  $C_{ij}$  is a number which has such a sign to the minor.

$$C_{11} = M_{11}, \quad C_{12} = -M_{12}, \quad C_{13} = M_{13}, \quad \cdots$$

$$\begin{pmatrix} + & - & + & \cdots \\ - & + & - & \cdots \\ + & - & + & \cdots \\ \cdots & \cdots & \cdots & \cdots \end{pmatrix}$$

$$C_{ij} = (-1)^{i+j} M_{ij}$$

## Determinant

$$|A| = a_{11}C_{11} + a_{12}C_{12} + a_{13}C_{13} + \cdots$$

# Example

**[Examples 5-2]** Calculate the determinant of this matrix.

$$A = \begin{pmatrix} 2 & 1 & -1 \\ 0 & 4 & 3 \\ -5 & 0 & -2 \end{pmatrix}$$

**Ans.**

$$\begin{aligned} |A| &= \begin{vmatrix} 2 & 1 & -1 \\ 0 & 4 & 3 \\ -5 & 0 & -2 \end{vmatrix} = 2 \begin{vmatrix} 4 & 3 \\ 0 & -2 \end{vmatrix} - \begin{vmatrix} 0 & 3 \\ -5 & -2 \end{vmatrix} + (-1) \begin{vmatrix} 0 & 4 \\ -5 & 0 \end{vmatrix} \\ &= 2 \cdot (-8) - 1 \cdot 15 + (-1) \cdot 20 = -51 \end{aligned}$$

# Exercise

**[Ex5-2]** Calculate the determinants of these matrices.

(1)

$$A = \begin{pmatrix} 2 & 1 \\ -1 & 3 \end{pmatrix}$$

(2)

$$A = \begin{pmatrix} 2 & 1 & 3 \\ 1 & 3 & 0 \\ 0 & 0 & 1 \end{pmatrix}$$

**Ans.**

Pause the video and solve the problem by yourself.



# Answer to the Exercise

**[Ex5-2]** Calculate the determinants of these matrices.

(1)

$$A = \begin{pmatrix} 2 & 1 \\ -1 & 3 \end{pmatrix}$$

(2)

$$A = \begin{pmatrix} 2 & 1 & 3 \\ 1 & 3 & 0 \\ 0 & 0 & 1 \end{pmatrix}$$

**Ans.**

$$(1) \quad |A| = \begin{vmatrix} 2 & 1 \\ -1 & 3 \end{vmatrix} = 2 \cdot 3 - 1 \cdot (-1) = 7$$

$$(2) \quad |A| = \begin{vmatrix} 2 & 1 & 3 \\ 1 & 3 & 0 \\ 0 & 0 & 1 \end{vmatrix} = 2 \cdot \begin{vmatrix} 3 & 0 \\ 0 & 1 \end{vmatrix} - 1 \cdot \begin{vmatrix} 1 & 3 \\ 0 & 1 \end{vmatrix} + 0 \cdot \begin{vmatrix} 0 & 4 \\ -5 & 0 \end{vmatrix} \\ = 2 \cdot 3 - 1 \cdot 1 + 0 = 5$$